

AD-23x U9 Slim

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

NXP UCODE 9

IC Attachment Technology

Strap Attach

Antenna Dimensions

70 x 10.5 mm / 2.756 x 0.413 in

International Standard

ISO/IEC 18000-63 Type C

Industry Segments

Apparel

Industrial Applications

Applications

Brand Protection

Supply Chain Management

Home Essentials

RoHS

EU Directive 2011/65/EU and

2015/863 Compliant



Fit for a wide variety of RFID tagging applications

AD-23x U9 Slim inlays from Avery Dennison provide maximum performance on a given footprint of 73 x 13.5 mm. Leveraging the capabilities of NXP's UCODE 9 chip, the Gen2 UHF RFID inlays are suitable for a wide variety of RFID tagging applications, including supply chain, inventory and logistics, apparel and home essentials.


AD-23x U9 Slim inlays feature 96-bit of EPC memory and a 96-bit unique factory locked TID number. A 48-bit unique serial number is factory-encoded into the TID. Delivery formats include dry, wet and pressure sensitive label.

Like all RFID products from Avery Dennison, AD-23x U9 Slim inlays are manufactured according to the industry's highest quality standards, as confirmed by the RFID Lab at Auburn University: The inspection body awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.


Technical features

Chip / IC Attachment Technology	NXP UCODE 9 / Strap Attach	
EPC and User Memory	96-bit and n/a	
TID Memory	96-bit / 48-bit unique serial number	
Product Code	IL-611239	IL-611588
Delivery Format	Wet inlay (RA-40)	Label
Die-Cut Dimension	73 x 13.5 mm / 2.874 x 0.532 in	73 x 13.5 mm / 2.874 x 0.532 in
Inlay Substrate	40# Paper	40# Paper
Face Sheet	-	TT2C (FASSON®) Bright White
Total Thickness	12.7 - 14.7 mils / 323-374 microns	16.2 - 18.2 mils / 411.48 - 462.28 microns
Standard Pitch	15.88 mm / 0.625 in	19.05 mm / 0.75 in
Web Width	82.55 mm / 3.25 in	82.55 mm / 3.25 in
Core Size	76 mm / 3 in	76 mm / 3 in
Quantity / Reel	TBD pcs/reel	TBD pcs/reel
Size of Roll	MAX OD: 13"	MAX OD: 8"
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F	
On-Metal	Non metal	
Certificate	ARC Specification Guide	

Orientation Sensitivity

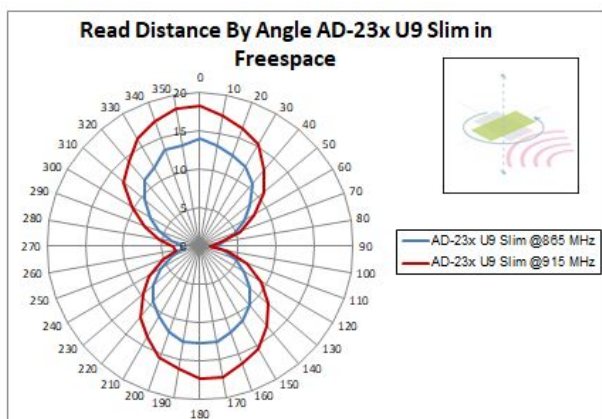

Read Range

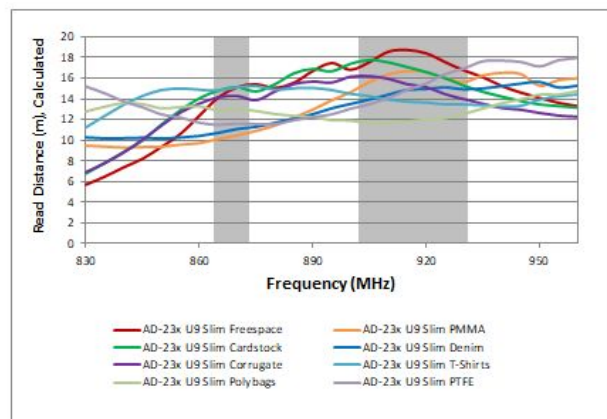

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact
+1-678-617-2359

Connect with us on:



© 2023 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

